



ELEVATED ROOFING

BUILDING THE KINGDOM ONE ROOF AT A TIME



A ROOFING CONTRACTOR YOU CAN TRUST

Integrity. Honesty. Quality.



GAF Timberline[®] NS
Natural Shadow[®] Lifetime[™] Shingles



Excellent performance and a natural shadow effect

Timberline[®] NS shingles deliver the rugged, dependable performance only a Timberline[®] roof can offer while creating a subtle, upscale aesthetic.



Timberline® NS Shingles

Benefits:

- **Great value** — Architecturally stylish and affordable
- **Attractive appearance** — Features a classic shadow effect. Lends any home a subtle, even-toned look with the warmth of wood in an asphalt shingle.
- **Highest fire rating** — Class A fire rating from Underwriters Laboratories
- **10-year StainGuard® Algae Protection Limited Warranty** against blue-green algae discoloration¹
- **DuraGrip™ Adhesive Seals shingles** tightly to help reduce the risk of shingle blow-offs. Eligible for up to a 130 mph limited wind warranty.³
- **Peace of mind** — Lifetime[†] Limited Warranty against manufacturing defects with Smart Choice® Protection period (non-prorated material and installation labor coverage) for the first ten years
- **A roof system** — Use TimberTex® premium ridge cap shingles, Master Flow™ vents and pipe boots, StormGuard® or WeatherWatch® leak barriers, and other premium GAF accessories found at gaf.com

Product details:

Product/System Specifics

- Fiberglass asphalt construction
- **Dimensions (approx.):** 13 1/4" x 39 3/8" (337 x 1,000 mm)
- **Exposure:** 5 5/8" (143 mm)
- **Bundles/Square:** 3
- **Pieces/Square:** 64
- **StainGuard® Algae Protection¹ Limited Warranty**
- **Hip/Ridge:** TimberTex®; TimberCrest®; Seal-A-Ridge®; Z®Ridge; Ridglass®
- **Starter:** Pro-Start®; QuickStart®; WeatherBlocker™

Applicable Standards & Protocols:

- UL Listed to ANSI/UL 790 Class A
- Florida Building Code Approved
- ICC-ES Evaluation Reports ESR-1475 and ESR-3267
- Meets the requirements of the Texas Department of Insurance.
- Classified by UL in accordance with ICC-ES AC438
- ASTM D3161, Class F
- ASTM D7158, Class H
- ASTM D3462²
- Miami-Dade County Product Control Approved

Regionally Available Colors:



¹ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products.

² 10-year StainGuard™ Algae Protection Limited Warranty against blue-green algae discoloration is available only on products sold in packages bearing the StainGuard™ logo. See *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions.

³ Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

³ 15-year 130 mph wind warranty requires special installation with 6 nails per shingle and GAF Starter Strip Products installed at the eaves and rakes. With standard installation wind warranty is 110 mph.


Note: It is difficult to reproduce the color clarity and actual color blends of these products. Before selecting your color, please ask to see several full-size shingles.



We protect what matters most™



The GAF Lifetime[†] Roofing System

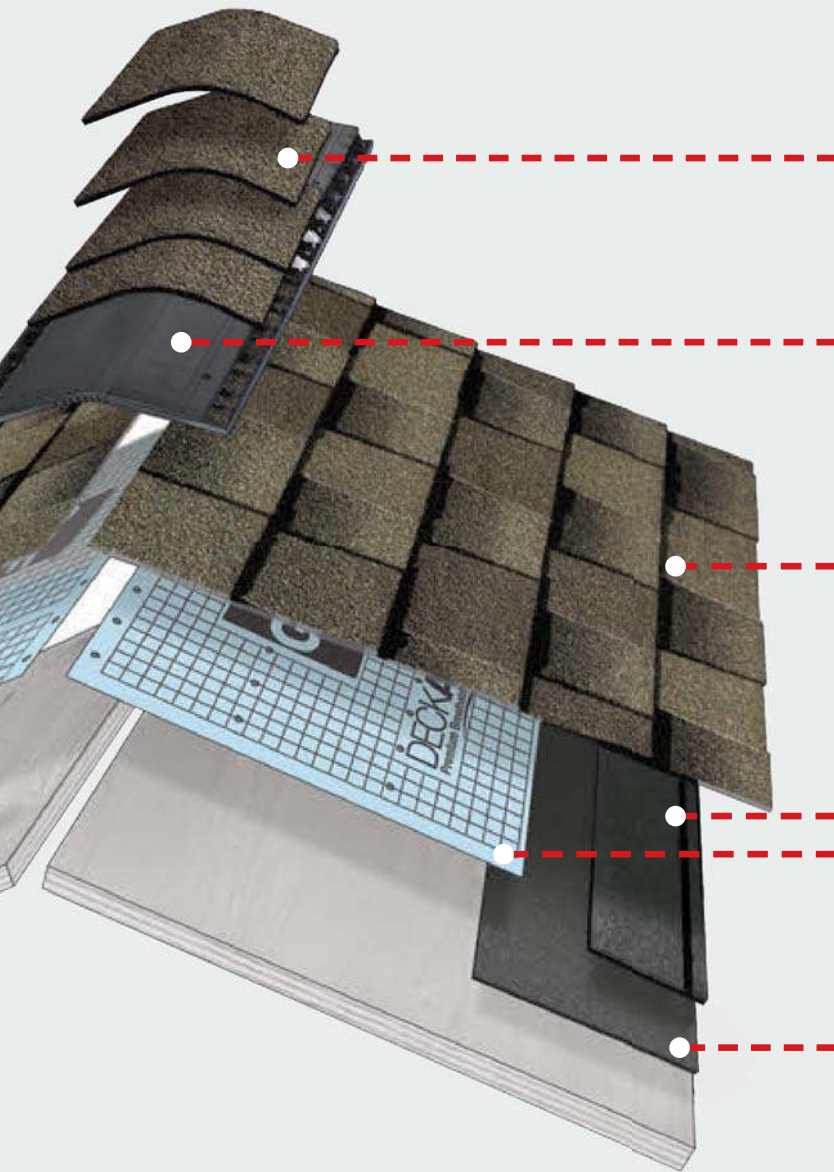

Ridge Cap Shingles

The finishing touch that helps defend against leaks at the hips and ridges



Cobra[®] Attic Ventilation

Helps reduce attic moisture and heat



Lifetime[†] Shingles

Beautify and protect for years to come



Starter Strip Shingles

Helps guard against shingle blow-offs



Roof Deck Protection

Helps shield the roof deck from moisture infiltration



Leak Barrier

Helps prevent leaks caused by wind-driven rain and ice dams

Install any GAF Lifetime[†] Shingle and at least 3 qualifying GAF Accessories and get a Lifetime[†] limited warranty on your qualifying GAF products plus

non-prorated coverage for the first 10 years. For even stronger coverage, ask your GAF factory-certified contractor¹ about enhanced GAF warranties.




[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

¹ Contractors enrolled in GAF certification programs are not employees or agents of GAF, and GAF does not control or otherwise supervise these independent businesses. Contractors may receive benefits, such as loyalty rewards points and discounts on marketing tools from GAF for participating in the program and offering GAF enhanced warranties, which require the use of a minimum amount of GAF products.

The GAF Lifetime Roofing System



Install any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories and you'll automatically get a Lifetime limited warranty on your shingles and all qualifying GAF accessories!*

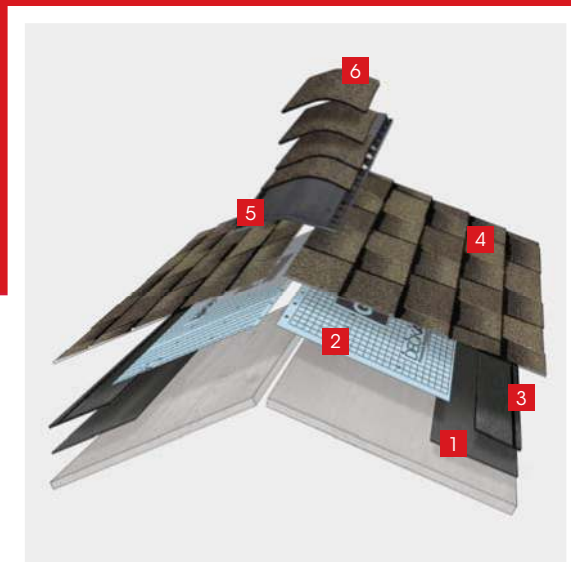

Leak Barrier
Helps prevent leaks caused by wind-driven rain and ice dams



Starter Strip Shingles
Helps guard against shingle blow-offs



Cobra® Attic Ventilation
Helps reduce attic moisture and heat



Roof Deck Protection
Helps shield the roof deck from moisture infiltration



Lifetime Shingles*
Beautify and protect for years to come



Ridge Cap Shingles
The finishing touch that helps defend against leaks at the hips and ridges



Visit gaf.com/Lifetime

* Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires use of GAF Lifetime shingles only. See *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Lifetime coverage on shingles and accessories requires use of any GAF Lifetime Shingle and any 3 qualifying GAF accessories. See *GAF Roofing System Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products.

Quix™

Underlayment



Secondary protection
from wind and moisture



Durable, affordable Quix™ roof accessories help protect your roof and your budget

Features:

- › Ideal for most steep-slope asphalt shingle roofing jobs
- › Lightweight and easy to handle
- › Spunbond surface enhances traction and walkability
- › Synthetic construction resists tearing
- › Gray facer for a cooler working surface than black asphalt felts

Product Details*:

Nominal Specifications:

For use with asphaltic shingles.

- › Roll size: 10 squares (1,000 sq. ft. [92.9 m²]) (excludes laps)
- › Roll width: 48" (1.22 m)
- › Roll length: 250' (76.2 m)
- › Approx. roll weight: 18 lb. (8.2 kg)
- › UV exposure: UV-stabilized polypropylene construction resists UV degradation for up to 60 days**

Code Approvals:

- › Meets or exceeds ASTM D8257

Explore all our solutions at quixroofing.com

* Values stated are approximate and subject to normal manufacturing variation. These values are not guaranteed and are provided solely as a guide.
** 60-day UV resistance is based on testing conducted under controlled laboratory conditions. This product is water resistant, NOT WATERPROOF. DO NOT USE as a temporary roof to protect property or possessions.

Start it. Finish it. **Quix™**


Pro-Start[®] Starter Strip Shingles

Help prevent shingle blow-off and eliminate waste



- A cost-effective alternative to using cut-up strip shingles as your starter course
- Made with a high-quality, factory-applied adhesive that will tightly lock your shingles in place
- Easy to use and install, with no cutting of starter strips on the roof

Pro-Start® Starter Strip Shingles

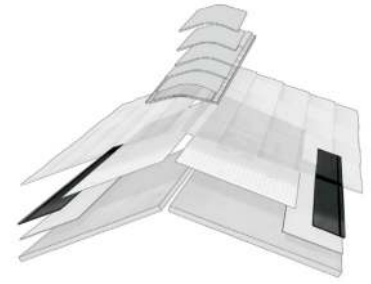

Benefits:

- Properly positioned **Dura Grip™ Adhesive** helps to lock down the shingles at the eaves and rakes to reduce the risk of shingle blow-off
- **Pre-perforated design** is easy to use and install, with no cutting on the roof
- **No more wasted time (or material)** cutting your own starter strips
- **At least 50% more coverage** per bundle (vs. typical 3-tab strip shingles)
- **GAF offers increased wind coverage** on many GAF Shingles when you use GAF starter strips³
- **Eligible for a Lifetime[†] Limited Warranty** when installed on Lifetime[†] Shingle roofs and they're an eligible accessory product in the Starter Strip category of GAF residential enhanced warranties

Installation:



Tears in half easily along perforation for easy installation



Installs at the eaves and rakes to help prevent shingle blow-off

Product details:

For use with most standard English and metric-sized asphalt shingles

- Full sheet: 13" x 38" (330 mm x 965 mm)
- Half sheet: 6.5" x 38" (165 mm x 965 mm)

Packaging

- **Bundle count:** 19 full sheets (38 individual pieces)

Coverage

- Approx. 120.33 lineal feet (36.69 lm) (when split in half)

Code Approvals:

- State of Florida approved
- Miami-Dade County Product Control approved
- ICC-ES ESR-1475
- Meets ASTM D3462¹, D3018
- ASTM D3161 Class F
- UL Listed to ANSI/UL 790 Class A²

[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the GAF Roofing System Limited Warranty, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

¹ Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

² Refer to UL Online Certification Directory for actual assemblies.

³ See *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions.



To learn more about the Lifetime[†] Roofing System visit gaf.com/Lifetime



We protect what matters most™






StormGuard® Film-Surfaced Leak Barrier

Help protect your home and roof system from wind-driven rain and damaging ice dams



- Help prevent leaks at potentially vulnerable areas of your asphalt shingle or metal roofing system
- Reduce the risk of costly repairs due to wall or ceiling staining from leaks
- Meet local building codes that require the use of leak barriers¹

StormGuard® Film-Surfaced Leak Barrier

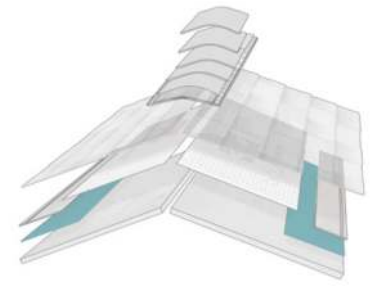

Benefits:

- **Strong protection** at the eaves and rakes, in valleys, and around chimneys and skylights
- **Self-seals** around fasteners to help avoid leaks
- **High-temperature compound** for use with asphalt shingles and most metal roofing systems²
- **Blue synthetic patterned surface** provides excellent wet/dry traction and is cooler to work on (vs. typical black underlayments)
- **Integral surface channels** help guide moisture away from the walking surface
- **Fiberglass-reinforced construction**
- **Eligible for up to a Lifetime[†] Limited Warranty** when used on Lifetime[†] Shingle roofs, an eligible accessory product in the Leak Barrier category of GAF residential enhanced warranties, and covered by up to a 10-year limited warranty³ when used with other approved non-asphaltic roof coverings

Helps address building codes in northern regions requiring the use of self-adhering leak barriers:¹

- For building codes in regions where ice dams can form at the eaves, particularly where the January average temperature is 25°F (-4°C) or lower (see map areas labeled "North")
- For any region where ice dams can occur, even where the average temperature is above 25°F (-4°C)
- For critical protection in warmer southern areas against wind-driven rain

Meets or exceeds the following requirements of ASTM D1970:

Property	Method	Requirement
Thickness (mils)	D5147	Min. 40
Tensile strength MD (lbf/in.)	D2523	Min. 25
Tensile strength CMD (lbf/in.)	D2523	Min. 25
Elongation at break, modified bitumen portion — MD and CMD (%)	D2523	Min. 10
Adhesion to plywood at 75°F (24°C) (lbf/ft.-width)	D903	Min. 12
Adhesion to plywood at 40°F (4°C) (lbf/ft.-width)	D903	Min. 2
Thermal stability (mm)	D1204	Max. 3
Low-temperature flexibility -20°F (-29°C)	D1970	Pass
Tear resistance MD (lbf)	D4073	Min. 20
Tear resistance CMD (lbf)	D4073	Min. 20
Moisture vapor permeance (U.S. perms)	E96 A	Max. 0.1
Sealability around nail	D1970	Pass
Waterproof integrity after low-temperature flexibility	D1970	Pass
Waterproof integrity of lap seam	D1970	Pass



To learn more about the Lifetime[†] Roofing System visit gaf.com/Lifetime



Product Details:

Nominal Specifications:

For asphalt shingles and most metal roofing systems²

- **Roll size:** 2 squares (200 ft.² [18.58 sq. m]), excludes laps
- **Roll width:** 36" (0.914 m)
- **Roll length:** 66.7' (20.33 m)
- **High-temp rating:** 250° F (121.1° C)²
- **UV exposure:** Up to 90 days, if necessary
- **Shelf life:** Best if used within 1 year from date of manufacture

Code Approvals:

- Meets or exceeds the performance criteria of ASTM D1970
- State of Florida Approved
- Miami-Dade County Product Control Approved
- Component of a UL Listed ANSI/UL 790 Class A system when used with UL Class A shingles⁴
- ICC-ES Evaluation Report (ESR-1322)
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment
- Meets or exceeds CSA A123.22

¹ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/ structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

² Source: International Building Code (IBC) and International Residential Code (IRC). Always check local building codes for requirements in your area.

³ The high-temperature compound is suitable for most metal roofing system applications. For use under copper and zinc or for information on other approved non-asphaltic roofing systems, contact GAF Technical Support at 1-800-766-3411.

⁴ See *StormGuard® Film-Surfaced Leak Barrier Limited Warranty for Non-Asphaltic Roofing Systems* for complete coverage and restrictions.

⁵ Refer to UL Online Certification Directory for actual assemblies.



We protect what matters most™




Cobra® Rigid Vent 3™ Exhaust Vent for Roof Ridge

Remove excess heat and moisture from your attic and protect your roof system from premature deterioration



- Improve energy efficiency by reducing attic heat and your summer air-conditioning load
- Limit the growth of harmful mold and mildew
- Minimize peeling of paint inside and out

Cobra® Rigid Vent 3™ Exhaust Vent for Roof Ridge

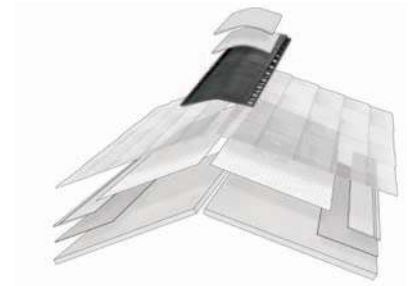

Benefits:

- **Allows heat and moisture to escape** at the most effective location — the ridge
- **Shingle-over design** blends into the ridge line
- **Engineered for durability** with high-impact UV-resistant polymers
- **External baffles** with crush-resistant internal structure
- **Includes 3" corrosion-resistant ring shank nails on each vent** for proper fastening of the vent and cap shingles



- **Unique EasyTear® sizing feature** allows you to hand-tear the vent in 3" increments — no cutting and less waste
- **Passes the 110 mph wind-driven rain test per TAS 100(A)**¹
- **Eligible for up to a Lifetime[†] limited warranty.** It's also an eligible accessory product in the Attic Ventilation category of GAF residential enhanced warranties.



Balanced Ventilation:

Balanced attic ventilation means there's an equal amount of air entering it as there is exiting it. The amount of exhaust ventilation must **never** exceed the amount of intake ventilation at the soffits or eaves. GAF recommends a minimum of 1 sq. ft. of net free ventilation for every 300 sq. ft. of attic floor space. Always consult local building codes for specific ventilation requirements.

How much do I need?

Calculate the total square footage of your attic floor space and then review the chart below for how much Cobra® Rigid Vent 3™ Premium Exhaust Vent for Roof Ridge is needed:

Total attic sq. footage	Recommended length of Cobra® Rigid Vent 3™ Exhaust Vent (ft.)	Minimum Intake Ventilation (net free area in sq. in.)
1,600	22	396
1,900	26	468
2,200	30	540
2,500	34	612
2,800	38	684
3,100	42	756
3,400	46	828

Note: Chart above based on 1/300 rule. Always have a balanced attic ventilation system. In no case should the amount of exhaust ventilation at or near the ridge exceed the amount of intake ventilation at or near the soffit. Visit gaf.com/ventcalculator for more details.

Product details:

For use in warmer climates

- 11.5" width — for 12" width ridge cap shingles
- 9" width — for 10" width ridge cap shingles
- 18 sq. inches per lineal foot of net free ventilating area
- Hand nail installation with included 3" ring shank nails
- For roof pitches 3:12 to 16:12

Code Approvals:

- Miami-Dade County Product Control Approved
- State of Florida Approved
- UL ERI5072-01
- Texas Department of Insurance Product Evaluation RV-29
- UL Listed to ANSI/UL 790 Class C²



1. Warm, moist air escapes attic through **Cobra® Rigid Vent 3™ Exhaust Vent for Roof Ridge** (installed under ridge cap shingles)
2. Fresh air enters attic through intake vent at or near the soffit

¹ Under controlled laboratory testing.

[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

² Refer to UL Online Certification Directory for actual assemblies







To learn more about the Lifetime Roofing System, visit gaf.com/Lifetime



We protect what matters most™



WARRANTY SELECTION GUIDE

		BASE COVERAGE GAF Shingle & Accessory Limited Warranty	SYSTEM COVERAGE GAF Roofing System Limited Warranty	GOOD* 	BETTER* 	BEST* 
Manufacturing Defect Coverage	GAF Lifetime* Shingles	Lifetime*	Lifetime*	Lifetime*	Lifetime*	Lifetime*
	GAF Accessories*	40 yrs.	Lifetime*	Lifetime*	Lifetime*	Lifetime*
	Up-front (100%) Coverage Period	Only 10 yrs.	Only 10 yrs.	50 yrs.	50 yrs.	50 yrs.
	Covers Roofing System?	No	Yes (entire system)	Yes (entire system)	Yes (entire system)	Yes (entire system)
	Cost Of Installation Labor Included?	Only 10 yrs.	Only 10 yrs.	Lifetime*	Lifetime*	Lifetime*
Workmanship Coverage (when GAF Lifetime* Shingles are installed)	Misapplication of GAF Shingles and Accessories?	No***	No***	No***	10 yrs. (Coverage provided and backed by GAF)	25/30 yrs. (Coverage provided and backed by GAF)
	Misapplication Of Covered Flashings?	No***	No***	No***	10 yrs. (Coverage provided and backed by GAF)	25/30 yrs. (Coverage provided and backed by GAF)
Peace Of Mind	Disposal Costs Included? (when necessary)	No	No	No	Yes (For manufacturing defects or misapplication)	Yes (For manufacturing defects or misapplication)
	Tear-Off Costs Included? (when necessary)	No	No	Yes (For manufacturing defects only)	Yes (For manufacturing defects or misapplication)	Yes (For manufacturing defects or misapplication)
	Contractor Factory Certified?*	No (Anyone can install)	No (Anyone can install)	Yes	Yes	Yes
	Warranty Transferable For Free?	Yes	Yes	Yes	Yes	Yes
	Good Housekeeping Protection On Roofing System? 	Yes (U.S. Only)	Yes (U.S. Only)	Yes (U.S. Only)	Yes (U.S. Only)	Yes (U.S. Only)

*Warranty coverage varies by manufacturer. See applicable warranty for complete coverage and restrictions. The word "Lifetime" refers to the length of coverage provided by the GAF Shingle & Accessory Ltd. Warranty, GAF Roofing System Limited Warranty, System Plus Limited Warranty, Silver Pledge Limited Warranty, or Golden Pledge Limited Warranty, as applicable, and means as long as the original individual owner(s) of a single-family detached residence (or eligible second owner(s)) owns the property where the qualifying GAF products are installed. For owners/structures not meeting the above criteria, Lifetime coverage is not applicable. Lifetime coverage on shingles requires use of GAF Lifetime shingles only. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. Lifetime coverage on shingles and accessories requires use of any GAF Lifetime Shingle and any 3 qualifying GAF accessories. See GAF Roofing System Limited Warranty for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products.

** Contractor certification is only for installations covered by GAF enhanced warranties.

*** Some limited workmanship coverage may be available through your contractor.



GAF 3-Star President's Club Award Winner

Elevated Roofing



A mark of excellence. Each year, GAF, North America's largest roofing manufacturer, recognizes a select group of GAF Master Elite® Contractors as 3-Star President's Club Award winners. These contractors are seen as the best of the best contractors certified by GAF.



Levels of success

The GAF President's Club Award is the top distinction that a GAF Master Elite® contractor can earn within the GAF contractor certification program. Contractors can build on their success with unique 1, 2, and 3 Star award levels. 3 Star award winners represent the best of the best.

Eligibility and length of star status

- Only GAF Master Elite® contractors in good standing are eligible.
- A contractor must meet the requirements for winning an award within one calendar year.
- The award is valid for the calendar year in which it is presented to the contractor.

Criteria a GAF Master Elite® Contractor must fulfill

	Rewards squares Shingles only. Invoices must be submitted no later than 1/31 of current year to be considered for previous year's awards.	+	Warranty squares Silver Pledge™ and Golden Pledge® warranty registrations per calendar year	+	Learning credits Per calendar year	+	Years as a Master Elite®
3 Star	10,000		6,000		50		7
2 Star	6,000		4,000		40		5
1 Star	3,000		2,000		30		2

How to earn CARE learning credits

	Learning Portal path	Webinar	Pro Field Guide
Virtual path	Multiple paths available, each taking about 6 hours to complete. 10 credits per path completed.	3 credits per enrolled attendee per completion (EVS, IHS, Storm Restoration, LIR Included)	3 credits per test completion
In-person path	3 credits (up to 1 day), 10 credits (over 1 day) per enrolled attendee who completes training (EVS, IHS, Storm Restoration, LIR Included)	10 credits per company (At least 1 owner or manager must be enrolled)	10 credits per enrolled attendee
			Wealth Builder
			10 credits per enrolled attendee
			Expos
			3 credits per enrolled attendee

Track your progress

Starting January 2024, GAF will offer a customized experience in the GAF Partner Portal that contractors can use to track their GAF President's Club progress. The experience provides updates on each of GAF's qualifications: Reward squares, warranty squares, learning credits, and years as Master Elite® contractor.

For more information, contact your GAF Territory Manager

We protect what matters most™





COMMERCIAL & RESIDENTIAL

LICENSED ROOFING CONTRACTOR

Mike Witte, CRRL

has successfully met all the requirements and
conditions to become licensed by the
Roofing Contractors Association of Texas

LICENSE NUMBER:

03-0322

LICENSE VALID THROUGH: **1/31/2027**

ROOFING COMPANY:

Elevated Roofing, LLC

*The License referenced here is provided through and fully managed by the Roofing Contractors Association of Texas.
The Texas Department of Licensing & Regulation (TDLR) does NOT currently administer licensure for roofing contractors.*

